



Blade 01



Clamps 02

# TKE 330 SA - MA

Single head cutting-off machine



Single head, rising blade cutting-off machine for cutting at 90°, 45° to right and left, as well as intermediate angles.

Cutting zone 03



The images are only given for illustrative purposes

# TKE 330 SA - MA

Single head cutting-off machine

## 01

### Blade

The cutting-off machine is equipped with a carbide-tipped blade dia. 300 mm, mounted on a manually actuated feed system.

## 02


### Clamps

The machine is equipped with a set of horizontal and vertical clamps, which are actuated pneumatically in the S version while they are actuated manually in the M version.

## 03

### Cutting zone

The rugged cast iron horizontal work table with relative vertical fence rigidly coupled to the table forms the workpiece clamping area, extending over a considerable support area to allow optimum clamping of the workpieces.

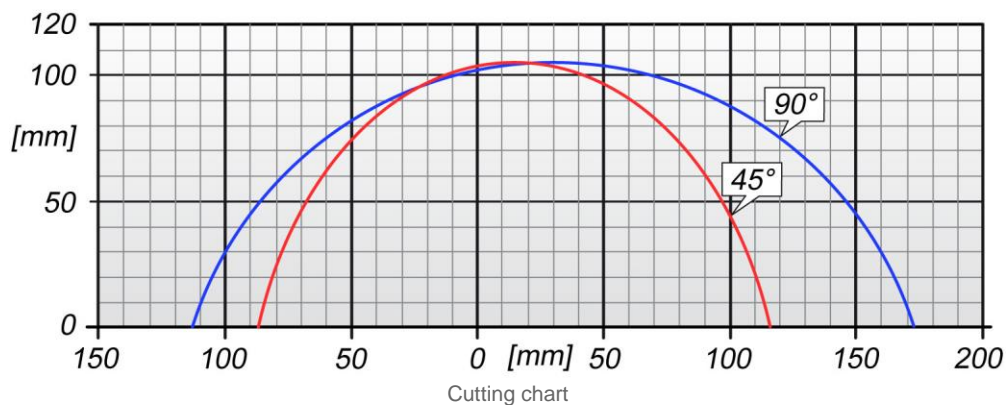

#### BLADE

Carbide-tipped blade dia. (mm)

300

#### BLADE FEED

Manual

#### CUTTING ZONE GUARDS

Local guard, mechanically operated

#### LUBRICATION SYSTEM

Manual

#### CLAMPS

Manual or pneumatic vertical clamp (depending on model)

1

Manual horizontal clamp

1

#### MOTOR

Three-phase brake motor, operating time 10 sec. (kW)

1,5