




**TKE 340 PA**  
Single head cutting-off machine



Control 01

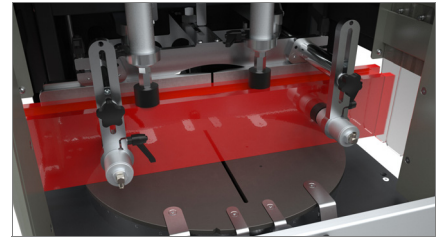


Clamps 02





03 02 01

The single head rising blade cutting-off machine, with left loading side, for cutting at angular settings from 15° to the left to 15° to the right and intermediate angles. Available with pneumatic blade feed.

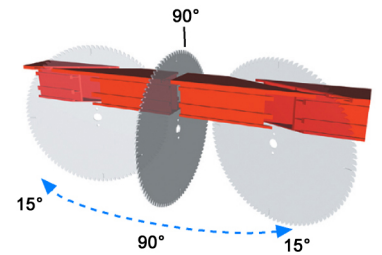

Cutting zone 03

Swarf drawer 04

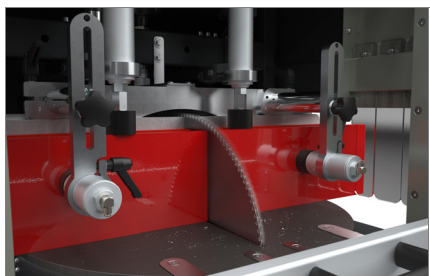

The images are only given for illustrative purposes

# TKE 340 PA

Single head cutting-off machine

## 01 Control

The control console allows user-friendly and intuitive machine operation.  
The practical lever with scale serves for rapid angular positioning of the blade.  
Instead, a further adjusting system allows adjustment of the clamp pressure and blade outfeed rate.

## 02 Clamps


Thanks to the technical solutions adopted, the horizontal and vertical clamps ensure the utmost rigidity in workpiece clamping as well as rapid repositioning of the clamps.  
Such characteristic allows the use of this machine in window/door manufacture.

## 03 Cutting zone

The rugged horizontal worktable associated with the vertical fence allows optimum positioning of the piece to be cut, thus ensuring considerable accuracy of the cut surface.

## 04 Swarf drawer

A practical swarf drawer allows efficient collection of the processing debris thus ensuring clean conditions of the machine and work area.

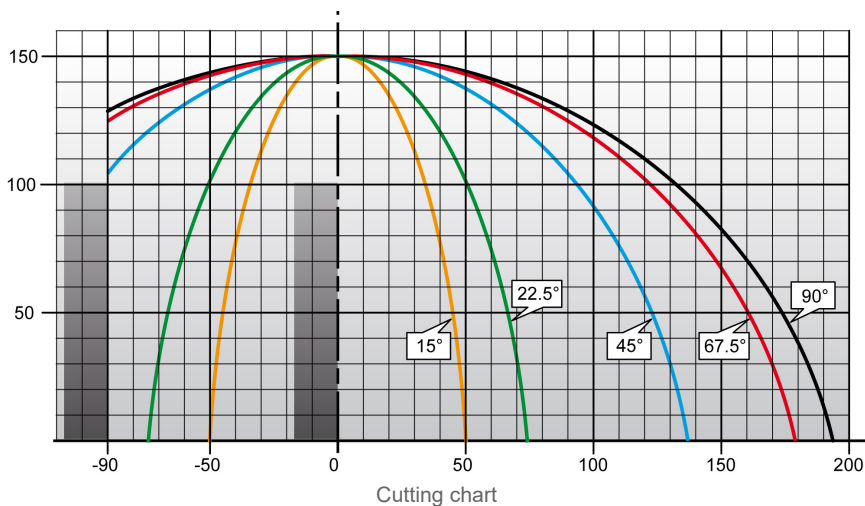

### BLADE

Carbide-Tipped Blade diam. (mm)

400

### BLADE FEED

Hydro-pneumatic

### CUTTING ZONE GUARDS

Full guard manually operated

### LUBRICATION SYSTEM

Spray-mist lubrication with oil emulsion

### CLAMPS

Vertical pneumatic clamps

2

### MOTOR

Three-phase motor (2800 rpm) (without brake) (kW)

1,5